



TOURYCABLE

Ed. 4.0// EN

Reliable Connections for Event & Media

TOURYCABLE is a globally leading supplier of electrical connect technology and has been an experienced and competent partner to the event and media industry for many years.

This brochure features a clear overview of our wide ranging of solutions for event and media technology, including our cables, wires, plugs, assemblies, tools and accessories. Together, we can find the ideal solution for your needs!



■ TABLE OF CONTENTS

POWER/MAIN CABLES

Socapex Cables	5
Power Extension Cables	7
Camlock Cables	9
Powercon Truecon Cables	10

AUDIO CABLES

Microphone Cables	13
Instrument Cables	17
Signal + Power Hybrid Cables	18
Multi-pins and Looms	19
Cable Reel and Accessories	23

SPEAKER CABLES

Speakon Cables	26
Multipin SPK Cables	29

LIGHTING CABLES

DMX Cables	32
DMX + Power Hybrid Cables	34

DIGITAL DATA CABLES

Network Cables	35
Ethercon+ Power Hybrid Cables	36
Multi-pins and Looms	37
Network Cable Reels	38
Optical Cables	39
Optical Fiber Cables Reels	42

VIDEO CABLES

BNC Cables	43
HDMI Cable Reel	44

Socapex Extension Cable



Type:	Socapex Cable
Connector:	19 Pin Socapex Male to Female
Cable:	High Flexible Rubber or Special PVC Cable
Standard Length:	1m to 100m
Connector option:	Nonbrand, or TUV ETL CE Certified Connector

Socapex Bulk Cable Types			
Cable Type	AWG	No. of Cores	Weight kg/km
H05RN-F	2.5mm2	19	1075
H05RN-F	12AWG	19	1446
Special PVC	2.5mm2	19	911
Special PVC	12AWG	19	845
H05RN-F	2.5mm2	13	760
H05RN-F	12AWG	13	1078
Special PVC	2.5mm2	13	487
Special PVC	12AWG	13	789

H05RN-F



Socapex Break in/out Cable



Type:

Connector:

Cable:

Standard Length:

Connector A option:

Connector B option:

Toury Grade Socapex Break in/out cable

Toury Grade Socapex Connector male or female

Bare end; Powercon; Truecon; Edison; AUS; CEE

H05VV5-F High Flexible Cable

1m-1.2m

TUV CE Certified Connector for Option

Nonbrand, Neutrik, Seetronic, Rean and others

Socapex Break in/out Cable Types				
Type	Part Number	Side A	Side B	Cable Size
Break in	TRSCB01	Socapex Female	/	2.5mm2 / 12awg
	TRSCP01	Socapex Female	Powercon White	2.5mm2 / 12awg
	TRSCT01	Socapex Female	Truecon Male	2.5mm2 / 12awg
	TRSCE01	Socapex Female	Edison Male	2.5mm2 / 12awg
	TRSCA01	Socapex Female	AUS Male	2.5mm2 / 12awg
	TRSCC01	Socapex Female	CEE Male	2.5mm2 / 12awg
Break out	TRSCB02	Socapex Male	/	2.5mm2 / 12awg
	TRSCP02	Socapex Male	Powercon Blue	2.5mm2 / 12awg
	TRSCT02	Socapex Male	Truecon Female	2.5mm2 / 12awg
	TRSCE02	Socapex Male	Edison Female	2.5mm2 / 12awg
	TRSCA02	Socapex Male	AUS Female	2.5mm2 / 12awg
	TRSCC02	Socapex Male	CEE Female	2.5mm2 / 12awg


Power Extension Cable




Type:	Power Extension Cable
Connector:	IP44 IP67 Connector
Cable:	Rubber Cable or Special PVC Cable
Standard Length:	1m to 100m
Voltage:	230V; 400V
Current:	16A; 32A; 63A; 128A
Number of phases:	Single or Three
Connector option:	Non Brand; Mennekes or Others

Power Extension Cable Types					
Type	Part Number	IP Rated	Voltage	Current	Size
Single Phase	TRPE14416	IP44	230V	16A	3x1.5mm2 / 3x2.5mm2
	TRPE16716	IP67	230V	16A	3x1.5mm2 / 3x2.5mm2
	TRPE14432	IP44	230V	32A	3x4mm2 / 3x6mm2
	TRPE16732	IP67	230V	32A	3x4mm2 / 3x6mm2
	TRPE16763	IP67	230V	63A	3x16mm2
	TRPE167128	IP67	230V	125A	3x35mm2
Three Phase	TRPE34416	IP44	400V	16A	5x2.5mm2
	TRPE36716	IP67	400V	16A	5x2.5mm2
	TRPE34432	IP44	400V	32A	5x6mm2
	TRPE36732	IP67	400V	32A	5x6mm2
	TRPE36763	IP67	400V	63A	5x16mm2
	TRPE367128	IP67	400V	125A	5x35mm2

Rubber Cable

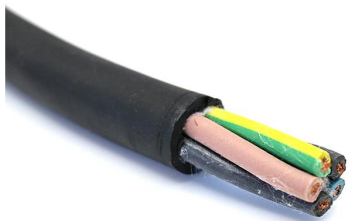

Special PVC Cable



Cable Type SY



Power Break in/out Cable



Type: IP44 IP67 Power Break in/out Cable
 Connector: IP44 IP67 Power Extension Connector
 Powerlock Connector; Lugs; Bare End
 Cable: Starquad Audio Cable
 Standard Length: 0.5m-1.5m
 Connector option: Non Brand; Mennekes or Others

Power Break in/out Cable Types			
Part Number	Side A	Side B	Cable Size
TRPB367PSL00	3Phase IP67 Plug/Socket	5x lugs	16amp -125amp
TRPB367PCS63	3Phase IP67 Plug	5x Powerlock Source	63amp / 25mm2
TRPB367SCD63	3Phase IP67 Socket	5x Powerlock Drain	63amp / 25mm2
TRPB367PCS125	3Phase IP67 Plug	5x Powerlock Source	125amp / 35mm2
TRPB367SCD125	3Phase IP67 Socket	5x Powerlock Drain	125amp / 35mm2
TRPB144P2S16	Single Phase IP44 Plug	2x Single Phase IP44 Socket	16amp / 2.5mm2
TRPB167P2S16	Single Phase IP67 Plug	2x Single Phase IP67 Socket	16amp / 2.5mm2
TRPB144P3S16	Single Phase IP44 Plug	3x Single Phase IP44 Socket	16amp / 2.5mm2
TRPB167P3S16	Single Phase IP67 Plug	3x Single Phase IP67 Socket	16amp / 2.5mm2
TRPB144P2S32	Single Phase IP44 Plug	2x Single Phase IP44 Socket	32amp / 4mm2
TRPB167P2S32	Single Phase IP67 Plug	2x Single Phase IP67 Socket	32amp / 4mm2
TRPB344P2S32	3Phase IP44 Plug	2x 3Phase IP44 Socket	32amp / 4mm2
TRPB367P2S32	3Phase IP67 Plug	2x 3Phase IP67 Socket	32amp / 4mm2

Powerlock Cable



Type: Powerlock Cable
Connector: IP67 Powerlock Source to Drain
Powerlock Source/Drain to Lugs
Cable: Cable Type SC Type W, Rubber Cable
Standard Length: 1m to 100m
Current: 120A to 450A

Powerlock Cable Types			
ConnectorA	ConnectorB	Current	Size
Powerlock Source	Powerlock Drain	135A	25mm2
		169A	35mm2
		207A	50mm2
		268A	70mm2
		382A	120mm2
		441A	150mm2
Powerlock Source	Lug	135A	25mm2
		169A	35mm2
		207A	50mm2
		268A	70mm2
		382A	120mm2
		441A	150mm2
Powerlock Drain	Lug	135A	25mm2
		169A	35mm2
		207A	50mm2
		268A	70mm2
		382A	120mm2
		441A	150mm2

Cable Type SC



Cable Type W



Powercon Cable



Type:	Powercon Cable
Connector:	Powercon Blue to Powercon White
Cable:	High Flexible Rubber or Special PVC Cable
Cable Size:	3x1.5mm ² 3x2.5mm ²
Standard Length:	1m to 100m
Connector option:	Nonbrand, Neutrik, Seetronic, Rean and others

Truecon Cable



Type:	Truecon Cable
Connector:	True1 Male to True1 Female
Cable:	High Flexible Rubber or Special PVC Cable
Cable Size:	3x1.5mm ² ; 3x2.5mm ² ; 12/3 awg
Standard Length:	1m to 100m
Connector option:	Nonbrand, Neutrik, Seetronic, Rean and others

Powercon Adapter Cable



Type:	Powercon Cable
Connector:	Powercon to Schuko; US IEC; AUS Plugs
Cable:	High Flexible Rubber or Special PVC Cable
Cable Size:	3x1.5mm ² 3x2.5mm ²
Standard Length:	1m to 100m
Connector option:	Nonbrand, Neutrik, Seetronic, Rean and others

Truecon Adapter Cable



Type:	Truecon Cable
Connector:	Truecon to Schuko; US IEC; AUS Plugs
Cable:	High Flexible Rubber or Special PVC Cable
Cable Size:	3x1.5mm ² 3x2.5mm ²
Standard Length:	1m to 100m
Connector option:	Nonbrand, Neutrik, Seetronic, Rean and others

Powerconbox



Type:

Connector:

Housing Material:

Connector Types:

Powercon Splitter

1 IN to 4 OUT or 1 IN to 8 OUT

Rugged Steel Construction

4/8*White to 1*Blue, 4/8*White to 1*White

Trueconbox



Type:

Connector:

Housing Material:

Connector Types:

Truecon Splitter

1 IN to 4 OUT or 1 IN to 8 OUT

Rugged Steel Construction

4/8*Female to 1*Male, 4/8*Female to 1*Male

3 Pin XLR Cable




Type:	3 Pin XLR Cable
Connector:	3 Pin XLR Male to Female Connector
Cable:	Low capacitance Twisted PE Insulated Cable
Standard Length:	1m to 100m
Application:	This XLR cable for professional use in media radio and stage technology
Connector option:	Nonbrand, Neutrik, Seetronic, Rean and others

XLR Bulk Cable Types					
Part Number	AWG	Cable OD mm	No. of Cores	Conductor Cross Sectional Area	Shielding
TR-120	21-22 (0.38mm ²)	6.2	2	2x 47/0.1	96/0.1 Spiral Shielded
TR-27	24	6.2	2	2x 27/0.1	96/0.1 Braid + Al Foil Shielded
TR-37	22	6.2	2	2x 37/0.1	128/0.1 Braid + Al Foil Shielded

TR-120



TR-37

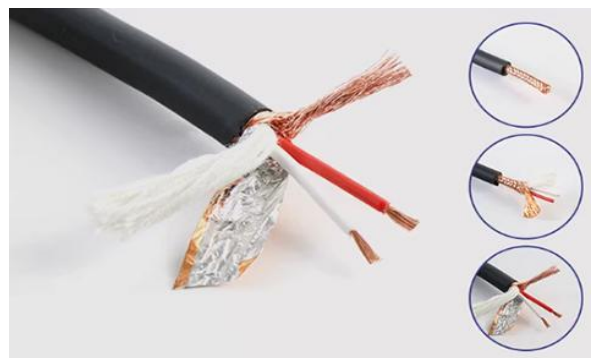

IP65 3 Pin XLR Cable



Type:	3 Pin IP65 XLR Audio Cable
Connector:	Waterproof 3 Pin XLR Male to Female Connector
Cable:	Low capacitance Twisted PE Insulated Cable
Standard Length:	1m to 100m
Application:	Outdoor, industrial, and mobile installations where protection against dust and water is required.
Connector Type :	XLR connectors
Feature:	Additional rubber cover on the female plug button

IP65 5 Pin XLR Cable



Type:	5 Pin IP65 XLR Audio Cable
Connector:	Waterproof 5 Pin XLR Male to Female Connector
Cable:	Low capacitance Twisted PE Insulated Cable
Standard Length:	1m to 100m
Application:	Outdoor, industrial, and mobile installations where protection against dust and water is required.
Connector Type :	XLR connectors
Feature:	Additional rubber cover on the female plug button

Multi-pin XLR Cable



4 Pin XLR Cable



5 Pin XLR Cable



6 Pin XLR Cable



7 Pin XLR Cable

Min XLR Cable



3 PIN Min Male to Min Female



3 PIN Min Male to Min Male



3 PIN Min Female to Min Female



4 PIN Min Male to Min Female



3 PIN Male to Min Female



3 PIN Female to Min Male



3 PIN Male to Min Male



3 PIN Female to Min Female

Angled XLR Cable



3 Pin Angled Male to Angled Female



3 Pin Angled Male to Female



3 Pin Angled Female to Female



3 Pin Short Angled Male to Short Angled Female

XLR to Jacket Cable



3 Pin Male to TRS



3 Pin Female to TRS



3 Pin Male to TS



3 Pin Female to TS



3 Pin Male to Angled TRS



3 Pin Male to Angled TRS



3 Pin Male to Angled TRS



3 Pin Female to Angled TS

The XLR connector can be changed to min and angled type

Jacket to Jacket Cable



TRS to TRS



Angled TRS to TRS



Angled TRS to Angled TRS



TS to TS



Angled TS to TS



Angled TS to Angled TS

XLR+ Powercon Hybrid Cable



Type:

XLR Combo Cable

Connector:

3/5 Pin XLR Male + Powercon White

3/5 Pin XLR Female + Powercon Blue

Cable:

High Flexible Powercon/Signal Combo Cable

Other Power Connector Option:

US IEC Plug; Schuko Plug; AUS Plug

Notion for 5 pin XLR combo:

1 Pair 5 Pin XLR default

2 Pair 5 Pin XLR for option

IP65 XLR+ Truecon Hybrid Cable



Type:

IP65 XLR Combo Cable

Connector:

IP65 3/5 Pin XLR Male + Truecon Female

IP65 3/5 Pin XLR Female + Truecon Male

Cable:

High Flexible Power/Signal Combo Cable

Standard Length:

1m to 10m

Connector Option:

Rubber cover 3/5 pin XLR connector for option.

Notion for 5 pin XLR combo:

1 Pair 5 Pin XLR default

2 Pair 5 Pin XLR for option


Multi-Pin Audio Extension Cable



Type:	Toury Grade Multi-pin Audio Extension Cable
Number of Channel:	8/12/16/24 Channel Audio Cable
Connector:	Toury Grade IP67 SVK Connector male and female
Cable:	Starquad Audio Cable
Standard Length:	5m 10m 15m 20m 30m 50m
Connector option:	TUV CE Certified Connector for Option

Multi-pin Audio Bulk Cable Types				
Part Number	Cable OD mm	No. of Cores	Conductor Cross Sectional Area	Shielding
TRG-8	13.5	8	20/0.1	Copper Braid + Al Foil Shielded
TRG-12	15.8	12	20/0.1	Copper Braid + Al Foil Shielded
TRG-16	18.5	16	20/0.1	Copper Braid + Al Foil Shielded
TRG-24	19.5	24	20/0.1	Copper Braid + Al Foil Shielded
TRG-32	25	32	20/0.1	Copper Braid + Al Foil Shielded
TRG-40	27	40	20/0.1	Copper Braid + Al Foil Shielded

TR-16

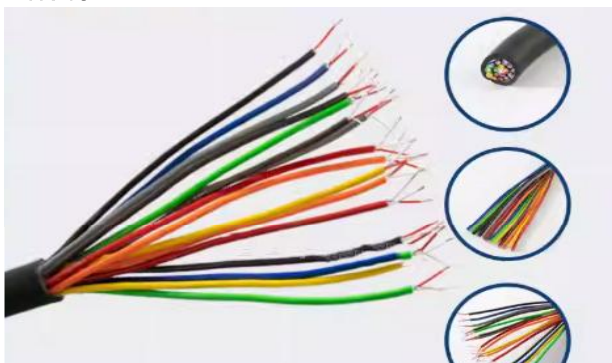

TR-24



Multi-Pin Audio Break in/out Cable



Type: Toury Grade Multi-pin Audio Break in/out cable
 Number of Channel: 8/12/16/24 Channel Audio Cable
 Connector: Toury Grade P67 SVK Connector male or female
 3 Pin XLR Connector Male or Female / TRS
 Cable: Starquad Audio Cable
 Standard Length: 2m 3.5m
 Connector option: TUV CE Certified Connector for Option

Multi-pin Audio Break in/out Cable Types			
Part Number	Side A	Side B	Cable Size
TRGFX08	25P SPK Female	3x 8P SPK Male	1.5mm2/2.5mm2
TRGFX12	25P SPK Male	3x 8P SPK Female	1.5mm2/2.5mm2
TRGFX16	25P SPK Female	3x NL8 Female	1.5mm2/2.5mm2
TRGFX24	25P SPK Male	3x NL8 Female	1.5mm2/2.5mm2
TRGMX08	25P SPK Male	3x 8P NL8 Male	1.5mm2/2.5mm2
TRGMX12	25P SPK Female	6x 4P NL4 Female	1.5mm2/2.5mm2
TRGMX16	25P SPK Female	6x 4P NL4 Male	1.5mm2/2.5mm2
TRGMX24	25P SPK Male	6x 4P NL4 Female	1.5mm2/2.5mm2
TRGFT08	25P SPK Male	6x 4P NL4 Male	1.5mm2/2.5mm2
TRGFT12	25P SPK Male	12x 4P NL4 Male	1.5mm2/2.5mm2
TRGFT16	8P SPK Male	2x 4P NL4 Female	4mm2
TRGFT24	8P SPK Male	3x 4P NL4 Female	4mm2
TRGMT08	8P SPK Male	4x 4P NL4 Female	4mm2
TRGMT12	8P SPK Female	2x 4P NL4 Female	4mm2
TRGMT16	16	54 pin Male	/
TRGMT24	24	85 pin Male	/

Stage Audio Box with Multi Cable



Type

Connector:

Standard Length

Cable Type

Sheath Color

Stage Box with Multi-Channel Cable

Stage box Female xlr to fantail male xlr or trs

Stage box male xlr to fantail female xlr or trs

10/30/50/100 Meters

Starquad Audio Cable

Channel with plastic tubes and number tubes

Black Jacket and colorful inner jacket

Channel	Input	Return
8	8	4
12	8	
16	12	
20	16	
24	20	
28	24	
32	28	
36	32	
40	36	

Channel	Input	Return
16	8	8
20	12	
24	16	
28	20	
32	24	
36	28	
40	32	



Multi Channel Audio Loom



Type

Connector:

Channel

Standard Length

Cable Type

Sheath Color

Multi Channel Audio Cable

XLR Male to XLR Female

XLR Connector can be changed to TRS TS

4 / 6 / 8 / 12 / 16 Channel

1.5m 3m 5m

Starquad Audio Cable

Channel with plastic tubes and number tubes



DB-25 Multi Channel Audio Loom



Type

Connector:

Standard Length

Cable Type

Sheath Color

Multi Channel Audio Cable

8 CH Male/Female XLR or TRS to Male DB-25

6/10/15/20/30/40 Feet

Starquad Audio Cable

Channel with plastic tubes and number tubes

Black Jacket and colorful inner jacket



Stage Reel Multi Audio Snake Cable



Type

Stage Reel with Multi Cable

Connector:

Stage reel female xlr to fantail male xlr or trs

Stage reel male xlr to fantail female xlr or trs

Standard Length

30/50/80 Meters

Cable Type

Starquad Audio Cable

Sheath Color

Channel with plastic tubes and number tubes

Channel	Input	Return
8	8	4
12	8	
16	12	
20	16	
24	20	
28	24	
32	28	
36	32	
40	36	

Channel	Input	Return
16	8	8
20	12	
24	16	
28	20	
32	24	
36	28	
40	32	

Audio Box



Type:

Network Box

Connector:

RJ45 to 4*XLR Male/Female; TRS

Number of Channel

4 Channel

Multi-pin Connector Stage Box



Type

Male XLR 3P*4 to RJ45 Socket
Female XLR 3P*4 to RJ45 Socket

Multi-Pin Audio Connectors

19 Pin Audio Connectors



25 Pin Audio Connectors



37 Pin Audio Connectors



54 Pin Audio Connectors



85 Pin Audio Connectors



NL2 NL4 Speakon Cable



Type:	Speaker Cable
Connector:	2 Pole 4 Pole Speakon Connector
Cable:	High Flexible OFC Twisted Speaker Cable
Standard Length:	1m to 100m
Application:	This cable for professional use in media and stage technology
Connector option:	Nonbrand, Neutrik and others


Speaker Bulk Cable Types				
Core	AWG	MM2	Cable OD mm	Conductor DC Resistance Ohm/1km
2 Core OFC	/	4	9.4	4.6
	12	3.294	9	5.43
	/	2.5	8.3	7.8
	14	2.077	8	8.62
	/	1.5	7.2	12.6
	17	1	6.5	17.2
4 Core OFC	/	4	11.6	4.6
	12	3.294	11	5.43
	/	2.5	10	7.8
	14	2.077	10	8.62
	/	1.5	9	12.6
	17	1	8	17.2
6 Core OFC	/	4	14.8	4.6
	12	3.294	13.5	5.43
	/	2.5	12.5	7.8
8 Core OFC	/	4	16.8	4.6
	12	3.294	15	5.43
	/	2.5	14	7.8

NL8 Speakon Cable



Type:	Speaker Cable
Connector:	8 Pole Speakon Connector Female to Female
Connector Material:	Steel or Reinforced Composite
Cable:	High Flexible OFC Speaker Cable
Standard Length:	1m to 100m
Application:	This cable for professional use in media and stage technology
Connector option:	Nonbrand, Neutrik, Seetronic, Rean and others

NL8 Speakon Extension Cable

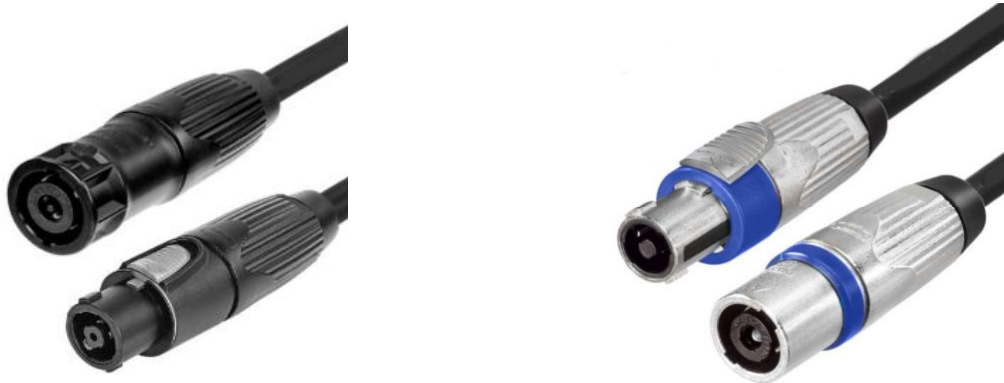

Type:	Speaker Cable
Connector:	8 Pole Speakon Connector Female to Male
Connector Material:	Steel or Reinforced Composite
Cable:	High Flexible OFC Speaker Cable
Standard Length:	1m to 100m
Application:	This cable for professional use in media and stage technology
Connector option:	Nonbrand, Neutrik, Seetronic, Rean and others



Speakon Break in/out Cable



Type:

Speaker Break in out cable

Connector:

4 Pole 8 Pole Speakon Connector Male Female

Connector Material:

Steel or Reinforced Composite

Cable:

High Flexible OFC Speaker Cable

Standard Length:

0.6m 1m 1.5m 2m 5m

Application:

This cable for professional use like line array, in media and stage technology

Connector option:

Nonbrand, Neutrik, and others

Speakon Break in out Cable Types

Part Number	Side A	Side B	Cable Size
TR8PM44PF	8P NL8 Male	4x 4P NL4 Female	4mm2
TR8PM44PM	8P NL8 Male	4x 4P NL4 Male	4mm2
TR8PF44PF	8P NL8 Female	4x 4P NL4 Female	4mm2
TR8PF44PM	8P NL8 Female	4x 4P NL4 Male	4mm2
TR8PM24PF	8P NL8 Male	2x 4P NL4 Female	4mm2
TR8PM24PM	8P NL8 Male	2x 4P NL4 Male	4mm2
TR8PF24PF	8P NL8 Female	2x 4P NL4 Female	4mm2
TR8PF24PM	8P NL8 Female	2x 4P NL4 Male	4mm2
TR8PM44PF	8P NL8 Male	2x 8P NL8 Female	4mm2
TR4PM24PM	4P NL4 Male	2x 4P NL4 Male	2.5mm2
TR4PM24PF	4P NL4 Male	2x 4P NL4 Female	2.5mm2
TR4PF24PM	4P NL4 Female	2x 4P NL4 Male	2.5mm2
TR4PF24PF	4P NL4 Female	2x 4P NL4 Female	2.5mm2

Multi-pin Speaker Extension Cable




Type:	Toury Grade Multi-pin Speaker Extension Cable
Number of pin:	4/8/19/25 Pin
Connector:	Toury Grade P67 SPK Connector male and female
Cable:	Flexible OFC Twisted Conductor Speaker Cable
Cable Size:	2.5mm ² , 4mm ²
Connector option:	TUV CE Certified Connector for Option

Toury Grade SPK Cable Types			
Part Number	Side A	Side B	Cable Size
TRG4PRM4PRF	4 Pin SPK Connector Male with Ring	4 Pin SPK Connector Female with Ring	4x2.5mm ² ; 4x4mm ²
TRG8PRM8PRF	8 Pin SPK Connector Male with Ring	8 Pin SPK Connector Female with Ring	8x2.5mm ² ; 8x4mm ²
TRG8PRM8PF	8 Pin SPK Connector Male with Ring	8 Pin SPK Connector Female	8x2.5mm ² ; 8x4mm ²
TRG19PRM19PRF	19 Pin SPK Connector Male	19 Pin SPK Connector Female	16x2.5mm ² ; 16x4mm ²
TRG25PRM25PRF	25 Pin SPK Connector Male with Ring	25 Pin SPK Connector Female with Ring	24x2.5mm ² ; 24x4mm ²
TRG25PRM25PF	25 Pin SPK Connector Male with Ring	25 Pin SPK Connector Female	24x2.5mm ² ; 24x4mm ²

OFC Conductor Cable



Twisted Conductor

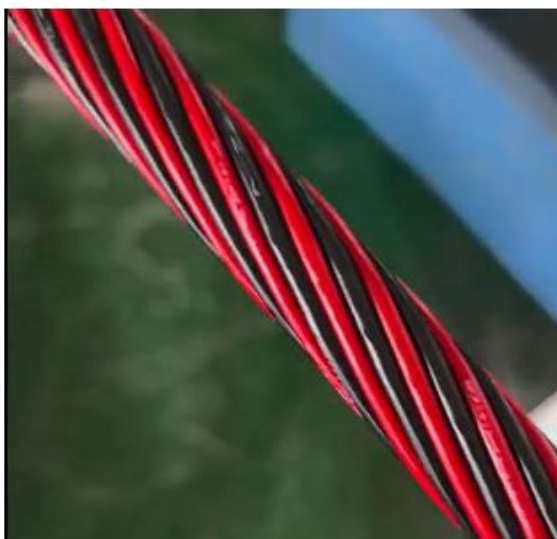

Multi-Pin Speaker Break in/out Cable



Type:	Toury Grade Multi-pin Speaker Break in/out cable
Number of Channel:	4 8 25 Pin
Connector:	Toury Grade P67 SPK Connector male or female
Cable:	Flexible OFC Twisted Conductor Speaker Cable
Cable Size:	2.5mm ² , 4mm ²
Connector option:	TUV CE Certified Connector for Option

Speakon Break in out Cable Types			
Part Number	Side A	Side B	Cable Size
TRP25PF38PM	25P SPK Female	3x 8P SPK Male	1.5mm ² /2.5mm ²
TRP25MF38PF	25P SPK Male	3x 8P SPK Female	1.5mm ² /2.5mm ²
TRP25PF38PF	25P SPK Female	3x NL8 Female	1.5mm ² /2.5mm ²
TRP25MF38PF	25P SPK Male	3x NL8 Female	1.5mm ² /2.5mm ²
TRG8PM24PF	25P SPK Male	3x 8P NL8 Male	1.5mm ² /2.5mm ²
TRG8PM24PM	25P SPK Female	6x 4P NL4 Female	1.5mm ² /2.5mm ²
TRG8PF24PF	25P SPK Female	6x 4P NL4 Male	1.5mm ² /2.5mm ²
TRG8PF24PM	25P SPK Male	6x 4P NL4 Female	1.5mm ² /2.5mm ²
TRG8PM44PF	25P SPK Male	6x 4P NL4 Male	1.5mm ² /2.5mm ²
TRG4PM24PM	25P SPK Male	12x 4P NL4 Male	1.5mm ² /2.5mm ²
TRG4PM24PF	8P SPK Male	2x 4P NL4 Female	4mm ²
TRG4PF24PM	8P SPK Male	3x 4P NL4 Female	4mm ²
TRG4PF24PF	8P SPK Male	4x 4P NL4 Female	4mm ²
TRG4PF24PF	8P SPK Female	2x 4P NL4 Female	4mm ²

Speaker Box



Type

Male XLR 3P*4 to RJ45 Socket
Female XLR 3P*4 to RJ45 Socket

Multi-Pin Speaker Connectors

4 Pin Speaker Connectors



8 Pin Speaker Connectors



19 Pin Speaker Connectors



25 Pin Speaker Connectors



DMX 512 Lighting Cable



Type: DMX Lighting Cable
 Connector: 3 / 5 Pin XLR Male to Female Connector
 Cable: 110 Ohm Lighting Control Cable
 Standard Length: 1m to 100m
 Connector option: Nonbrand, Neutrik, Seetronic, Rean and others

Connector A		Connector B		Cable
3P	Female	3P	Male	1 Pair
5P	Female	5P	Male	1 Pair
5P	Female	5P	Male	2 Pair
3P	Female	5P	Male	1 Pair
5P	Female	3P	Male	1 Pair
3P	Male	3P	Male	1 Pair
3P	Female	3P	Female	1 Pair
5P	Male	5P	Male	2 Pair
5P	Female	5P	Female	2 Pair
3P	Female	3P	Male	2 Pair Only use 1 pair
5P	Female	5P	Male	2 Pair Only use 1 pair

DMX Bulk Cable Types					
Part Number	AWG	Cable OD mm	No. of Cores	Conductor Cross Sectional Area	Shielding
TR-512	24	6.5	2	2x 28/0.1	128/0.1 TC Braid + Al Foil
TR-AES3	26	6	2	2x 25/0.08	80/0.1 TC Braid + Al Foil
TR-4E6S	24	6.2	4	2x 26/0.1	128/0.1 TC Braid + Al Foil

TR-512



TR-AES3



IP65 3 Pin DMX Cable



Type:	3 Pin IP65 DMX Lighting Cable
Connector:	Waterproof 3 Pin DMX Male to Female Connector
Cable:	110 Ohm Lighting Control Cable
Standard Length:	1m to 100m
Application:	Outdoor, industrial, and mobile installations where protection against dust and water is required.
Connector Type :	DMX connectors
Feature:	Additional rubber cover on the female plug button

IP65 5 Pin DMX Cable



Type:	5 Pin IP65 DMX Lighting Cable
Connector:	Waterproof 5 Pin XLR Male to Female Connector
Cable:	110 Ohm Lighting Control Cable (1 or 2 Pair)
Standard Length:	1m to 100m
Application:	Outdoor, industrial, and mobile installations where protection against dust and water is required.
Connector Type :	DMX connectors
Feature:	Additional rubber cover on the female plug button



DMX+ Powercon Hybrid Cable



Type:

Connector:

Cable:

Other Power Connector Option:

Notion for 5 pin XLR combo:

DMX Combo Cable

3/5 Pin DMX Male + Powercon White

3/5 Pin DMX Female + Powercon Blue

High Flexible Powercon/Signal Combo Cable

US IEC Plug; Schuko Plug; AUS Plug

1 Pair 5 Pin DMX default

2 Pair 5 Pin DMX for option

IP65 DMX + Truecon Hybrid Cable



Type:

Connector:

Cable:

Standard Length:

Connector Option:

Notion for 5 pin XLR combo:

IP65 DMX Combo Cable

IP65 3/5 Pin DMX Male + Truecon Female

IP65 3/5 Pin DMX Female + Truecon Male

High Flexible Power/Signal Combo Cable

1m to 10m

Rubber cover 3/5 pin DMX connector for option.

1 Pair 5 Pin DMX default

2 Pair 5 Pin DMX for option

Ethercon Cable



Type:	Ethernet Cables
Connector:	Ethercon Connector
Cable Type:	SF/UTP;S/FTP
Category:	CAT5E; CAT6; CAT6A
Standard Length:	1m to 100m
Connector option:	Nonbrand, Neutrik, Seetronic and others

RJ45 Cable



Type:	Ethernet Cables
Connector:	RJ45 Connector
Cable Type:	SF/UTP;S/FTP Cold Resistant
Category:	CAT5E; CAT6; CAT6A
Standard Length:	1m to 100m



Ethercon+ Powercon Hybrid Cable



Type:	Ethercon Combo Cable
Connector:	(2x) Ethercon + Powercon White (2x) Ethercon + Powercon Blue
Other Power Connector Option:	US IEC Plug; Schuko Plug; AUS Plug
Cable:	High Flexible Power/Signal Combo Cable
Standard Length:	1m to 10m

Ethercon + Truecon Hybrid Cable



Type:	Ethercon Combo Cable
Connector:	(2x) Ethercon + Truecon Male (2x) Ethercon + Truecon Female
Cable:	High Flexible Power/Signal Combo Cable
Standard Length:	1m to 10m

Multi Channel Network Loom



Type:

Connector:

Number of Channel

Standard Length

Cable Type

Category

Sheath Color

Multi Channel Network Loom

Ethercon Connector

2/4/6/8 Channel

CAT5E CAT6

SF/UTP S/FTP

10m/30m/50m/100m

Channel with plastic tubes and number tubes



Stage Network Box with Multi Network Cable



Type:

Connector:

Number of Channel

Category

Cable Type

Standard Length

Sheath Color

Stage Box with Multi Ethercon Cable

Ethercon Connector

4/6/8 Channel

CAT5E CAT6

SF/UTP S/FTP

10m/30m/50m/100m

Channel with plastic tubes and number tubes



Network Cable Reel



Type:

Connector:

Number of Channel

Standard Length

Cable Type

Standard Length

Sheath Color



Network Cable Reel

Ethercon Connector

2/4/6/8 Channel

CAT5E CAT6 CAT8

SF/UTP S/FTP

10m/30m/50m/100m

Channel with plastic tubes and number tubes

Network Audio Cable Adapter



Type:

Connector:

Number of Channel

Standard Length

Sheath Color



Network to XLR Adapter

Male/Female XLR to RJ45 Socket

4 Channel XLR

0.6M

Channel with plastic tubes and number tubes

Single Mode Armored Optical Fiber Cable



Type:

Connector:

Cable:

Cable Diameter:

Fiber optic details:

Number of Channel:

Standard Length:

Single Mode Optical Fiber Cable

FC/LC/DLC/SC/ST

TPU/LSZH Armored Cable

5.0mm

9/125 μm

2/4/6/8 Channel

1m to 1000m

Armored Optical Fiber



FC LC SC ST Connectors



Multi Mode Armored Optical Fiber Cable



Type:	Multi Mode Optical Fiber Cable
Connector:	FC/LC/DLC/SC/ST
Cable:	TPU/LSZH Armored Cable
Cable Diameter:	3.0mm 2.0mm
Fiber optic details:	OM3 OM4; 50/125μm 62.5/125μm
Number of Channel:	2/4/6/8 Channel
Standard Length:	1m to 1000m

Armored Optical Fiber



FC LC SC ST Connectors



MPO Fiber Cable



Type:	Multi Mode Optical Fiber Cable
Connector:	MPO
Cable:	TPU/LSZH Armored Cable
Cable Diameter:	3.0mm
Fiber optic details:	OM3 OM4; 50/125μm 62.5/125μm
Number of Channel:	8/12/16/24
Standard Length	0-100m

MPO Break in/out Cable



Type:	Multi Mode Optical Fiber Cable
Connector:	MPO to FC/LC/DLC/SC/ST
Cable:	TPU/LSZH Armored Cable
Cable Diameter:	3.0mm
Fiber optic details:	OM3 OM4; 50/125μm 62.5/125μm
Number of Channel:	8/12/16/24
Standard Length	0-100m



Single Mode Optical Fiber Cable Reel



Type:	Single Mode Optical Fiber Cable
Connector:	FC/LC/DLC/SC/ST
Cable:	TPU/LSZH Armored Cable
Cable Diameter:	5.0mm
Fiber optic details:	OM3 OM4; 50/125 μ m 62.5/125 μ m
Number of Channel:	8/12/16/24
Standard Length	0-1000m

Multi Mode Optical Fiber Cable Reel



Type:	Multi Mode Optical Fiber Cable
Connector:	FC/LC/DLC/SC/ST/MPO
Cable:	TPU/LSZH Armored Cable
Cable Diameter:	5.0mm
Fiber optic details:	OM3 OM4; 50/125 μ m 62.5/125 μ m
Number of Channel:	8/12/16/24
Standard Length	0-1000m

BNC Cable



Type:	3/6/12g BNC Cable
Connector:	BNC Male to BNC Male
Cable:	75 Ω SDI Cable
Cable Option:	Non Brand, CANARE, Belden or others
Standard Length:	0-100m
Connector option:	Nonbrand, CANARE, Neutrik and others

BNC Cable Reel



Type:	3/6/12G BNC Cable Reel
Connector:	BNC Male to BNC Male
Cable:	75 Ω SDI Cable
Cable Option:	Non Brand, CANARE, Belden or others
Standard Length:	0-100m
Connector option:	Nonbrand, CANARE, Neutrik and others

Armored HDMI Fiber Optic Cable



Type:	8K HDMI 2.1 Cable
Connector:	HDMI to HDMI
Cable:	Armored HDMI Fiber Optic Cable
Support:	8K@60Hz & 4K@120Hz/144Hz
Standard Length:	0-100m
Approval:	HDMI 1.4, 2.0 & 2.1 spec, including eARC, 21:9 Aspect Ratio and more

HDMI Fiber Optic Cable Reel



Type:	8K HDMI 2.1 Cable Reel
Connector:	HDMI to HDMI
Cable:	Armored HDMI Fiber Optic Cable
Support:	8K@60Hz & 4K@120Hz/144Hz
Standard Length:	0-100m
Approval:	HDMI 1.4, 2.0 & 2.1 spec, including eARC, 21:9 Aspect Ratio and more

TOURYCABLE

SHANGHAI TOURYCABLE CO.,LTD

Tel: +86-15821550499

Whatsapp: +86-15821550499

Post Code: 201805

No. 5618 Bao'an Road, Shanghai, China

Email : info@tourycable.com

Website: www.tourycable.com

Whatsapp



Facebook



Youtube

